## (19) World Intellectual Property Organization

International Bureau



## 

(43) International Publication Date 21 May 2004 (21.05.2004)

**PCT** 

(10) International Publication Number WO 2004/041598 A1

(51) International Patent Classification<sup>7</sup>: 21/20, 21/22

B60R 21/16,

(21) International Application Number:

PCT/SE2003/001693

(22) International Filing Date:

4 November 2003 (04.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0226042.0

7 November 2002 (07.11.2002) GB

(71) Applicant (for all designated States except US): AUTO-LIV DEVELOPMENT AB [SE/SE]; SE-447 83 Vårgårda (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BERNTSSON, Mats [SE/SE]; Bomgatan 6B, SE-412 64 Goteborg (SE). JACONELLI, Hakan [SE/SE]; Gotagatan 20, SE-441 39 Alingsas (SE). KJELL, Fredrik [SE/SE]; ljungvagen 9, SE-441 10 Alingsas (SE).

(74) Agent: MEULLER, Erik; Autoliv Development AB, SE-447 83 Vårgårda (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ. TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN AIR-BAG ARRANGEMENT AND A METHOD OF PREPARING AND MOUNTING AN AIR-BAG

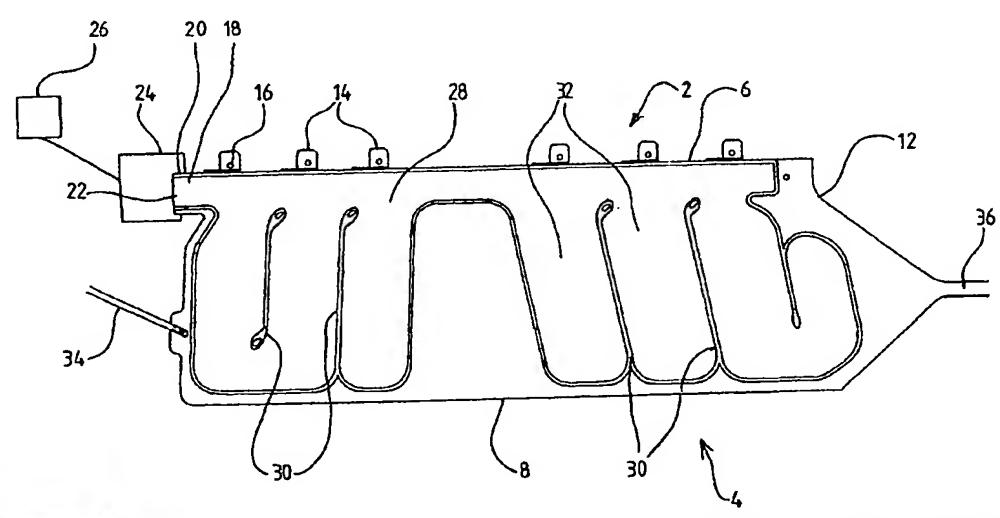

(ST) Abstracts An inflatable curtain (2) has an attachment edge (6) provided with mounting elements (14) for mounting the inflatable curtain in a vehicle cabin for deployment beside an interior surface (38) of the vehicle cabin. A gas-flow passage (28) extends along the attachment edge, and communicates with cells (32) defined by parallel seams (30) in an inflatable region (4) which has a lower edge (8). Each mounting element (14) is located between the seams (30) of a respective cell (32). The inflatable curtain is formed from an inhoard layer of fabric and an outboard layer of fabric, and is rolled from the region of the lower edge (8) with the roll being adjacent the outboard layer and with part of the inboard layer forming the exterior of the roll.